




Georgia Southern University Williams Center Fenestration Commissioning

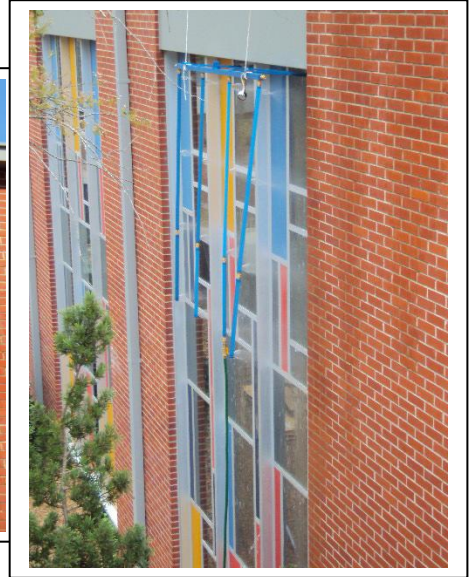


This project for Georgia Southern University includes a renovation of the storefront window systems. The two story structure required extensive repairs to the existing decorative storefront and installation of new fenestration systems.

All window and door openings were tested in accordance with AAMA 502.8 B standards.

The field testing examined sealant joints at frame to wall, seals at glass to frame and the internal drainage system of the storefront units. Testing simulates wind driven rain events with air pressure differential and/or static water pressure. It is intended to identify failures and allows retesting to validate repairs.

Field tests of mockup units can establish the standard of quality to be used throughout the work. Quality assurance testing at the completion of work verifies a successful project.

Design Firm: Studio 3 Design Group
General Contractor: Peter R Brown GC
Owner: University System of Georgia
Location: Statesboro, Georgia
Contact: Mr. Oscar Earl
912-478-1352

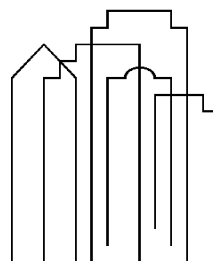

Merik, Inc.
3225 Shallowford Rd.
Suite 820
Marietta, GA 30062
770-565-3016 voice
770-565-3089 fax
www.merikinc.com